



Date: June 21, 2013

SERVICE BULLETIN NOTICE – MOELLER MARINE PRODUCTS


LP Portable Fuel Tanks

Part Numbers: 620003LP, 620048LP, 620048LP-PAL, 620049LP

Moeller Marine Products has discovered that the hang tags for the 3 and 6 gallon Low Permeation Portable Fuel Tanks are missing a set of instructions on the back of the tag. This set of instructions will guide the customer to correctly install connectors and ensure the 360° withdrawal assembly is tight. Without the instructions, it is possible for the customer to have a connector or withdrawal assembly installed on their tank improperly which could result in a potential leak. The instructions for proper installation are below. The use of Teflon Tape on the connector will help ensure a proper seal. It is also important once the withdrawal assembly is oriented into the desired position that the customer tightens the withdrawal assembly.

This notification is to make commerce aware of this matter.

If there are questions related to this notice please contact Moeller Marine Products Customer Service Department immediately at 1-800-432-8344 or at moellerinfo@moellermarine.com

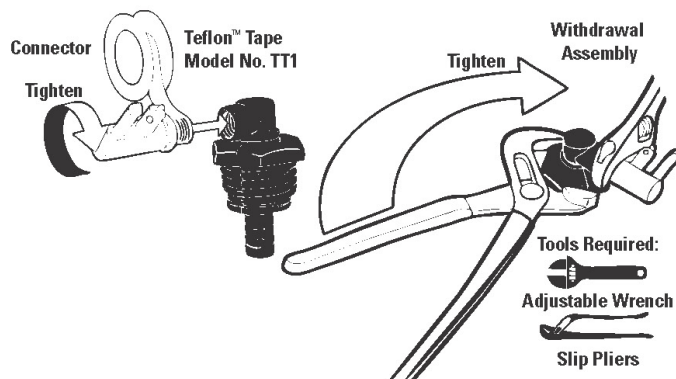

How to install connectors:

Note: For ease of installation Withdrawal Assemblies are not tightened down when shipped.

1. Ensure tank is empty.
2. Remove Withdrawal Assembly from the tank.
3. Apply Teflon™ tape to threads on Connector.
4. Hand tighten the Connector to the Withdrawal Assembly, then tighten another 1/4 turn with wrench.
5. Hand tighten the Withdrawal Assembly to the tank, then tighten another 3/4 of a turn with slip pliers while holding the Connector in the desired direction with wrench.